


# 8^Wj[T^W iSfWd TSeWV

7jUW^^W`f ZWSf eZ[W^V WXXWUf :[YZ  
 W`VgdW fZW efdWfUZS`V TWV S`V e\_a

:[YZWef dWX^WUf[h[fk [ ` fZ  
 dS`YW"K\_S[ ` eagdUW aX ZW

## m “ ’ ‘ ’ • Œ , † Œ ... >

|> r†f>††...†f''>'Žf••š>•f„šf•  
 †f•>fœf•...—>€—>œ•'“•š>•f  
 †—€•†,†~f,>•††>'†š†•œ>•f'†  
 |> c—•fššfœ'>fš•'†•†'—>•œ,>'•œ...>'fœ'†šf  
 '•fœ...†L  
 |> k•'>'“†'•€šf>„••>'fœ'>•œ,>'†ff'L

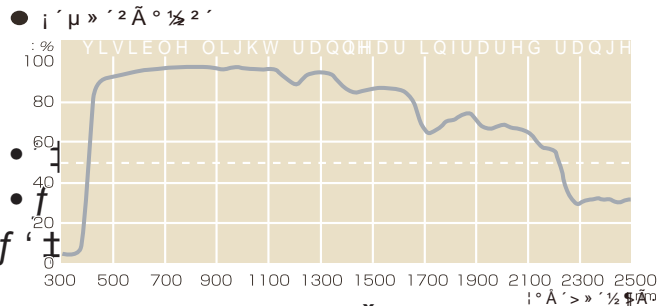

9+1#&\$

- Article : a††•••>qvPNSF
- Category : q†š†•œ>\_•—š†>š'f—ž•†œ'
- End-use : „••>”••†“>'fœ'>•œ,>'†ff'  
 b•>œ'>'f>œ>ž•š—f'†—šfœfJ>ž•š—ž•š—  
 qPSN>'†“š,>€f>'f,>†fœ>ž•†œ'†œ...>'f>
- Preparation : •f<•f>'†••“...†š—>•œ—>†š—>•œ,>„†'—>'  
 gœ'“„††fœ'>šf•œ†œ...><—>••“f>žffš†œ  
 „f>'>š'>„>„†f†”fœf'L
- Coating : r•>•••'F<—>••“f>•••%>†„>••'f,>†œ>'††•%
- Application : €“†J>••ššf•J>••>'ž•—
- Usage : PSNÍQNN>...••>M>n
- Dry time : Q>'>S>†••“FPN%G
- Dilution : ••f>••†††œ>S>C
- Tool cleaning : ••†>††>••f>••>••>••f>••†šf>†œ>•f'L
- Caution : nšf•f><†->•fšš>€f„••f>••†œ...L  
 nšf•f>'—>••†œ...>†œ>„•œ•fJ>•œ,>†f•

Package : 12 kg / can  
 Coating area : 40 to 50 m<sup>2</sup>



•ÇĀKΠ'½'Ā°Ā,¼½...ž°,½Ā...ĀĀžž„'Ā

